TEAM MIDGET



120L x 3M version with optional hand lance kit

Features

- Small, manoeuvrable, robust design
- Full sprayer controls
- Pump options to suit application
- Total tank drainage
- Standard CAT 1, 3-point linkage
- Robust welded steel tubular chassis and boom

Standard Fittings	Optional Extras
90L Main tank (100L gross)	 120L tank (130L gross)
3M 6 nozzle manual fold & lift spray boom	 4M spray boom (roller vane pump only)
 ½" Spray lines fitted with single nozzle assemblies (03 low drift IDK nozzles) 3-Section manual spray and pressure controls with gauge Hypro PTO Roller-vane pump (45Lpm @ 540 rpm) CAT 1 3-point linkage chassis 	 Retractable hose reel & lance 7M Hand lance kit only Walk-on boom 12V Master spray on/off Bout/foam marker Full electric spray controls XT nozzles Wheels/axle and drawbar

Tank	Boom	Nozzles	Pump	Controls
Impact	Manual rear	Anti-drip bodies	PTO Roller-	Manual 3-section
resistant polythene	folding with spring loaded outer sections	with Lechlar low drift IDK nozzles	vane (45Lpm @ 540 rpm)	with pressure regulation & gauge

Supplied with an adjustable pressure 3-section control system, the Midget is a very robust scaled down mounted sprayer that has been designed for the professional Green keeper/Grounds man who requires a simple, efficient, and accurate small tractor mounted sprayer.

Weights & Dimensions

Weight: 40Kg (empty)

Transport Width (3Mtr Boom): 1.2M





Unit 3 Lancaster Way Business Park, Witchford, Ely, Cambs, CB6 3NW. Telephone 01353 661211 Facsimile 01353 666642 E-Mail sales@team-sprayers.com www.teamsprayers.com



DJH 0620

TEAM BASIC



Features

- Modern tank designed to ensure full chemical usage
- Easily accessible suction filter
- Close coupled CAT 1 chassis
- 2 Pack painted chassis and boom for chemical resistance



Shown with optional PTO diaphragm pump

Standard Fittings	Optional Extras
 200Ltr polythene tank 	 73Lpm PTO diaphragm pump
 Roller-vane pump (PTO) 	 In-cab electric 3 section spray
 6M 12 nozzle manual fold 	and pressure controls
spray boom	 In-cab electric spray on/off
 PPE locker 	 Balanced volumetric controls
 Clean water hand wash tank 	 Bout/foam marker (5 or 20Ltr)
 3-section manual spray and 	 Triple nozzles assemblies
pressure controls	 Hose reel (10Mtr retractable)
 Cat 1, 3-point linkage 	Hand lance (7Mtr)
	Hose pipe holder
	Walk on boom

Tank	Boom	Nozzles	Pump	Controls
Impact resistant	6Mtr manual rear	Colour Coded	45Lpm PTO	Manual 3 section
Polythene	folding, spring	Quick-fit with	roller-vane	isolation with
	loaded outer	Check Valves	(540rpm)	pressure regulation
	sections			

The Team Basic mounted sprayer incorporates all the requirements to meet the latest spraying legislation and the needs of the modern Green keeper. Reliable, robust design and 'easy to use' operator controls make the machine very 'user friendly'.

Weights & Dimensions

Weight: 95 Kgs (empty) Transport Width: 1.9 Mtrs



DH 11.16

Unit 3 Lancaster Way Business Park, Witchford, Ely, Cambs, CB6 3NW. Telephone 01353 661211 Facsimile 01353 666642 E-Mail sales@team-sprayers.com www.teamsprayers.com

NATIONAL SPRAYER TESTING SCHEME

TEAM
Sprayers

Groundcare



TEAM CLUB GROUNDCARE SPRAYER



Effective, Accurate, Controlled









Team Club

STANDARD FEATURES





Controls

Balanced manually operated control valves to operate all spray and pressure functions.

Work station controlling primary functions to operate the sprayer and when cleaning or filling.

Chemical inductor:

20L hopper for safe transfer of liquids and powders via a high flow venturi system to the main tank, a rotary nozzle for cleaning containers.

Diaphragm pump:

High quality poly' diaphragm pump withstands any aggressive plant protection chemicals.

Clothes storage: For all PPE equipment.

Clean water supply: 15L for hand washing.

Booms

Boom construction:

All booms are manufactured from steel tubular sections for strength and durability.

Boom height adjustment: Manual 6-8m; Winch 10 and 12m

Boom stowage system secures boom assembly in the folded position.

'Break back' boom design is a standard feature on all models to avoid damage from unseen obstructions.

Transport width: Folds to compact - 1.9m (6m model); 2.4m (12m model).

Tank flushing:

50L clean water supply for main tank flushing with internal rotary nozzle.

OPTIONAL EXTRAS

Tank options: 300L, 400L, 500L, 600L, 800L

Boom options: 6M, 7M, 8M, 10M, 12M manual folding or 6 - 8M electric or hydraulic folding.

In cab electric spray controls to operate all spray and pressure functions.

Water suction: enabling tank filling via the main pump.

Dual covered boom system for sensitive areas or windy conditions.

Walk on boom (lightweight boom system for greens)

Hydraulic lift booms [10m / 12m only]


Computerised auto spray rate controller automatically adjusts spray application rate to forward speed.

Triple nozzle assemblies

enable the operator to select from a choice of 3 nozzle sizes for various applications.

Other Optional Extras


- Retractable hose reel and hand lance kit
- GPS boom section switching and mapping
- Stainless steel spray lines
- Bout / foam marker
- Hose holder for tank
- Upgraded 110Lpm diaphragm pump

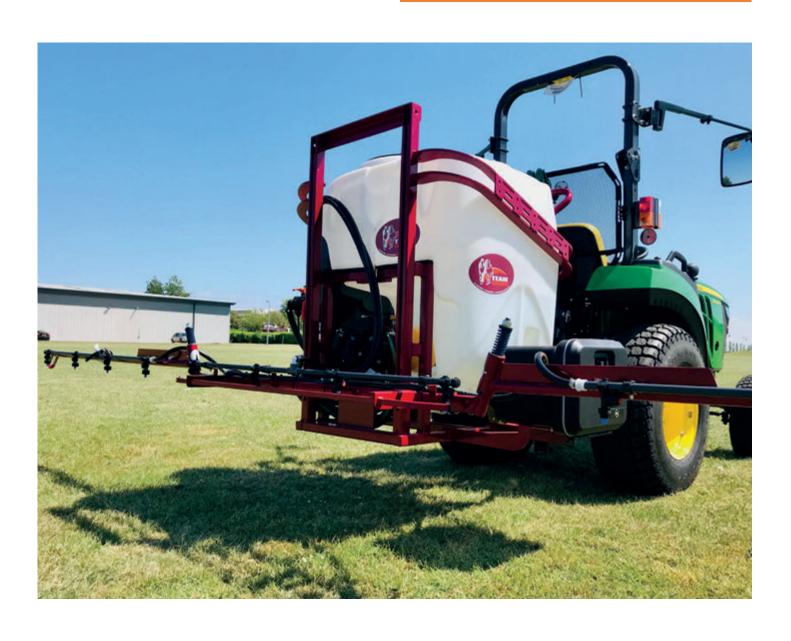

Team Club

TECHNICAL SPECIFICATIONS

Item	Dimension
Tank capacities (L)	300, 400, 500, 600, 800
Pumps (type / L per min)	Poly 2073 / 73
Boom lengths (m)	4, 6, 7, 8, 10, 12
Weight (Kg)	175 (300L x 6m); 285 (600L x 12m)
Total height (m)	1.6 (6m); 2 (12m)
Total width (m)	1.9 (6m); 2.4 (12m)
Rinse tank (L)	50

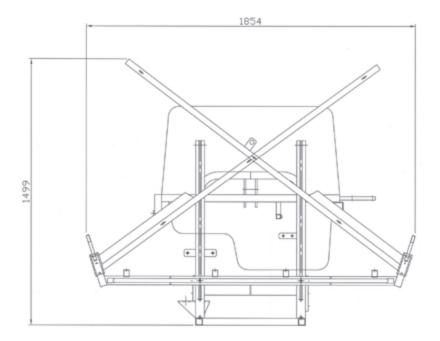







Team Sprayers Ltd Unit 3 Lancaster Way Business Park, Witchford, Ely, Cambridgeshire CB6 3NW

E sales@team-sprayers.com f

